




Phantom

15.100 PHANTOM HSS Centreerboor, 60°

DIN 333A, DIN 333A, NFE 66051A.

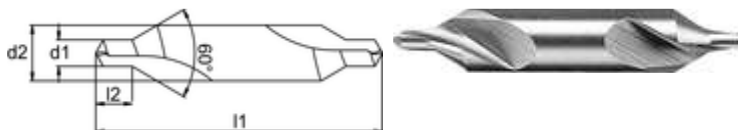

T.b.v. materiaalsoort:



Artikelnr.	d1	d2	l1	l2	Artikelnr.	d1	d2	l1	l2	Artikelnr.	d1	d2	l1	l2
15.100.0531°	0,5	3,15	25	0,6-0,9	15.100.2060	2	6	45	2,5-3,1	15.100.5013	5	12,5	63	6,3-7,2
15.100.0735	0,75	3,5	35	1,0-1,3	15.100.2063	2	6,3	45	2,5-3,1	15.100.5014	5	14	69	6,3-7,2
15.100.0831°	0,8	3,15	25	1,0-1,3	15.100.2563	2,5	6,3	45	3,1-3,8	15.100.5016	5	16	71	6,3-7,2
15.100.1031	1	3,15	31	1,3-1,7	15.100.2580	2,5	8	50	3,1-3,8	15.100.6018	6	18	77	8,0-8,9
15.100.1040	1	4	35	1,3-1,7	15.100.3090	3	10	55	3,9-4,6	15.100.6316	6,3	16	71	8,0-8,9
15.100.1231	1,25	3,15	31	1,6-2,0	15.100.3180	3,15	8	50	3,9-4,6	15.100.6320	6,3	20	80	8,0-8,9
15.100.1240	1,25	4	35	1,6-2,0	15.100.3190	3,15	10	55	3,9-4,6	15.100.8020	8	20	80	10,1-11,1
15.100.1550	1,5	5	40	2,0-2,6	15.100.3590	3,5	10	55	4,0-4,5	15.100.9025	10	25	100	12,8-13,8
15.100.1640	1,6	4	35	2,0-2,6	15.100.4010	4	10	55	5,0-5,9	15.100.9531	12,5	31,5	125	16,5-17,5
15.100.1650	1,6	5	40	2,0-2,6	15.100.4012	4	12	63	5,0-5,9					
15.100.2050	2	5	40	2,5-3,1	15.100.4013	4	12,5	63	5,0-5,9					

° Centreerboor is enkelzijdig uitgevoerd.

Voor de cassette met deze boren zie artikelnr. 19.540.