




Phantom

22.705 PHANTOM HSS Machinetap, Metrisch

ISO, 60°, onderbroken draad, met schilaansnijding voor doorlopende gaten, aansnijding 5 gangen, spaanhoek 3°.

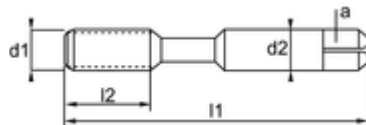

T.b.v. materiaalsoort:



Artikelnr.	d1	P	l1	l2	d2	a	Artikelnr.	d1	P	l1	l2	d2	a
22.705.0200	2	0,4	41	8	2,5	2	22.705.1200	12	1,75	89	29	9	7,1
22.705.0250	2,5	0,45	44	9,5	2,8	2,24	22.705.1400	14	2	95	30	11,2	9
22.705.0300	3	0,5	48	11	3,15	2,5	22.705.1600	16	2	102	32	12,5	10
22.705.0400	4	0,7	53	13	4	3,15	22.705.1800	18	2,5	112	37	14	11,2
22.705.0500	5	0,8	58	16	5	4	22.705.2000	20	2,5	112	37	14	11,2
22.705.0600	6	1	66	19	6,3	5	22.705.2200	22	2,5	118	38	16	12,5
22.705.0700	7	1	66	19	7,1	5,6	22.705.2400	24	3	130	45	18	14
22.705.0800	8	1,25	72	22	8	6,3	22.705.3000	30	3,5	138	48	20	16
22.705.1000	10	1,5	80	24	10	8							