




84.873 TORAX Boorbus

DIN 172A, middellange uitvoering, met kraag, in- en uitwendig geslepen, geheel gehard, tolerantie op de boringsdiameter F7, tolerantie op de buitendiameter n6.

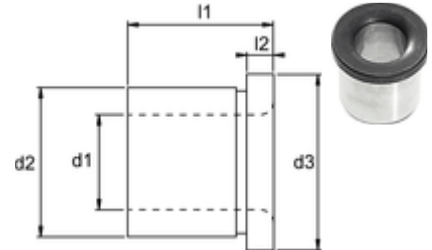

Artikelnr.	d1	d2	d3	l2	l1	Artikelnr.	d1	d2	d3	l2	l1
84.873.0120 - 84.873.0180	1,2 - 1,8	4	7	2	9	84.873.0610 - 84.873.0800	6,1 - 8	12	15	3	16
84.873.0190 - 84.873.0260	1,9 - 2,6	5	8	2	9	84.873.0810 - 84.873.1000	8,1 - 10	15	18	3	20
84.873.0270 - 84.873.0330	2,7 - 3,3	6	9	2,5	12	84.873.1020 - 84.873.1200	10,2 - 12	18	22	4	20
84.873.0340 - 84.873.0400	3,4 - 4	7	10	2,5	12	84.873.1225 - 84.873.1500	12,25 - 15	22	26	4	28
84.873.0410 - 84.873.0500	4,1 - 5	8	11	2,5	12	84.873.1525 - 84.873.1800	15,25 - 18	26	30	4	28
84.873.0510 - 84.873.0600	5,1 - 6	10	13	3	16	84.873.1825 - 84.873.2000	18,25 - 20	30	34	5	36

