


# Combi-Latex 395



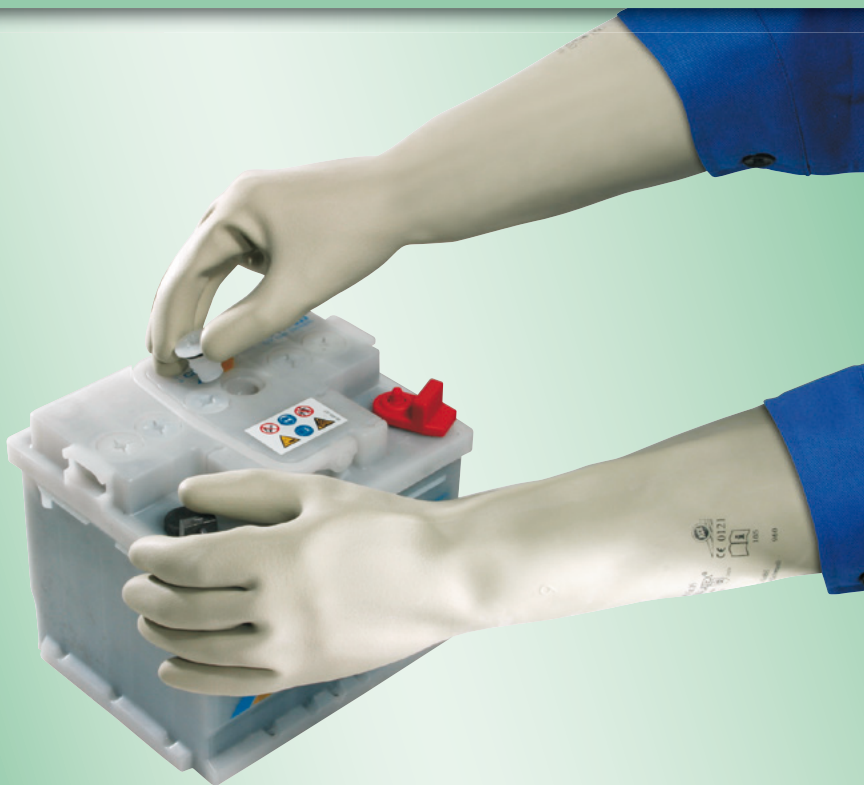


## APPLICATION

- › handling of acids and alkalis
- › cleaning
- › work with high mechanical strain
- › sewerage system cleaning
- › galvanising works

## QUALITIES AND ADVANTAGES

- › excellent mechanical resistance
- › good grip when handling wet parts
- › high elasticity
- › excellent low temperature flexibility
- › good puncture resistance



Article no.	395
Name	Combi-Latex 395
Material	natural latex
Description	cuff, roughened
Length (mm)	390 - 410
Total thickness (mm)	1 ± 0,1
Colour	cream
Size	9, 10, 11
Classification	category III    113x BKL



## FEATURES

- › AQL < 0,65
- › wide cuff for quick donning and doffing

[www.kcl.de](http://www.kcl.de)  
[sales@kcl.de](mailto:sales@kcl.de)



by Honeywell

## KCL GmbH

Industriepark Rhoen  
 Am Kreuzacker 9  
 36124 Eichenzell  
 Germany  
 Phone +49 6659 87-300  
 Fax +49 6659 87-318