


Montreal

4964A2FC1



Coverall

Another all-time classic in Flexothane. This coverall is not only perfectly wind and waterproof, it also offers you protection against liquid chemicals. An impenetrable barrier that is all the same durable, stretchable and much more comfortable than PVC.

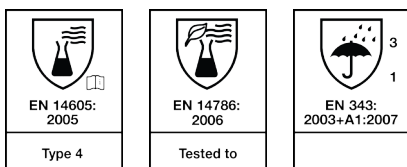

Coverall

Montreal - 4964A2FC1

European Standards:

- » EN 14605 : 2005 Type 4
- » Tested to EN 14786 : 2006
- » EN 343 : 2003 + A1 : 2007 / Class 3-1
- » CE
- » Tested for harmful substances according to Oeko-Tex® Standard 100 (1012048/Centexbel)

Exterior:

- » Straight collar
- » Foldaway hood in collar
- » Zip closure under double flap with press studs
- » Raglan sleeves
- » Sleeve and ankle narrowing by press studs
- » Elasticated waist in the back
- » High frequency welded seams

Interior:

- » Elasticated wind cuffs in sleeves

Fabric:

Flexothane® Classic: 100% polyamide knitting with PU coating; ± 180 g/m²

Sizes:

S - XXXL

Colour:

- » A41 Green Khaki
- » B90 Navy Blue
- » C38 Orange
- » H45 Royal Blue
- » N15 Black
- » Y58 Yellow

Packaging:

- » 10 pieces per box

Wash & Care instructions:



SIOEN head office

Fabriekstraat 23
B-8850 Ardoonie
Belgium
T: +32 (51) 740 800
F: +32 (51) 740 962
www.sioen-ppc.com



Discover
our products

© 2015 SIOEN - Protection through Innovation, Flexothane®, Siopor® and the SIOEN logo are trademarks of the SIOEN Industries Group.

Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. The right is reserved to amend this information without prior notice. All our technical files, style descriptions, presentations, designs and drawings, give the latest update of the standards and design or style features of each product. However, delivered products may comply with previous standards, design or style features. For that SIOEN disclaims any liability whatsoever. Contact our sales for full information if specific requirements are needed.