




PERFECTION VALVE PN10

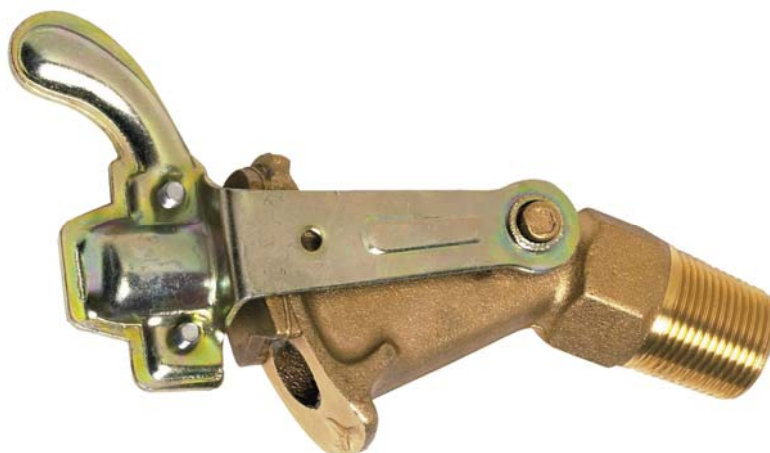

Size : DN 3/4" to 4"
Ends : Male BSP
Min Temperature : - 10°C
Max Temperature : + 100°C
Max Pressure : 10 Bars
Specifications : Male conical threaded
For decanting

Materials : Brass body up to DN 2" (Cast iron over)



PERFECTION VALVE PN10

SPECIFICATIONS :

- Male conical threaded BSP
- For decanting


USE :

- For common fluids of 2nd group
- Min and max Temperature Ts : - 10°C to + 100°C
- Max Pressure PN : 10 bars

RANGE :

- Brass body up to DN 2" and cast iron over, male conical threaded BSP from DN 3/4" to DN 4" **Ref.**

MATERIALS :

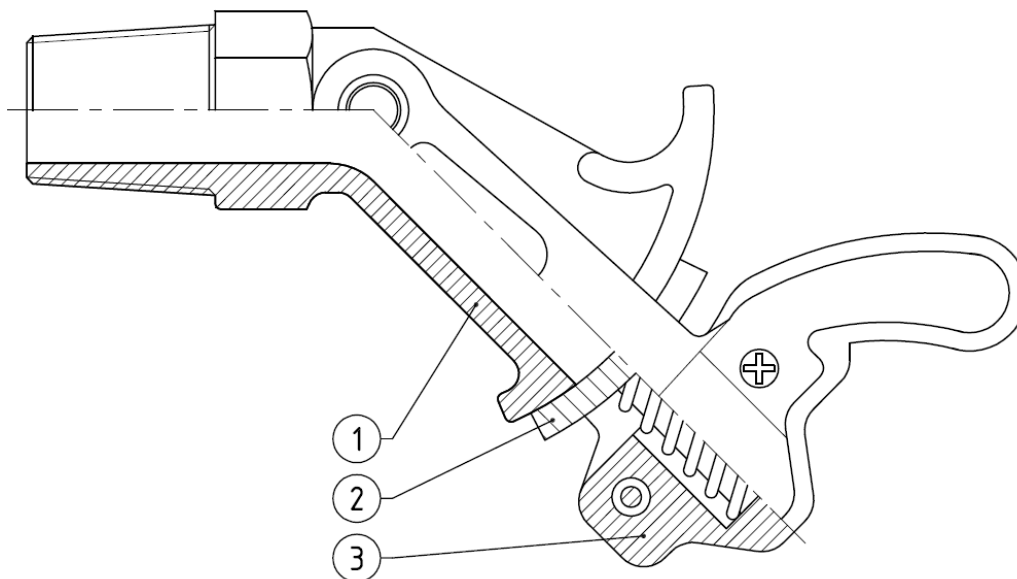


Item	Designation	Materials
1	Body DN 3/4" – 2"	Brass
1	Body DN 2"1/2 – 4"	Cast iron
2	Obturator	Brass
3	Lever DN 3/4" – 2"	Galvanized steel
3	Lever DN 2"1/2 – 3"	Brass
3	Lever DN 4"	Cast iron



PERFECTION VALVE PN10

SIZE (in mm) :

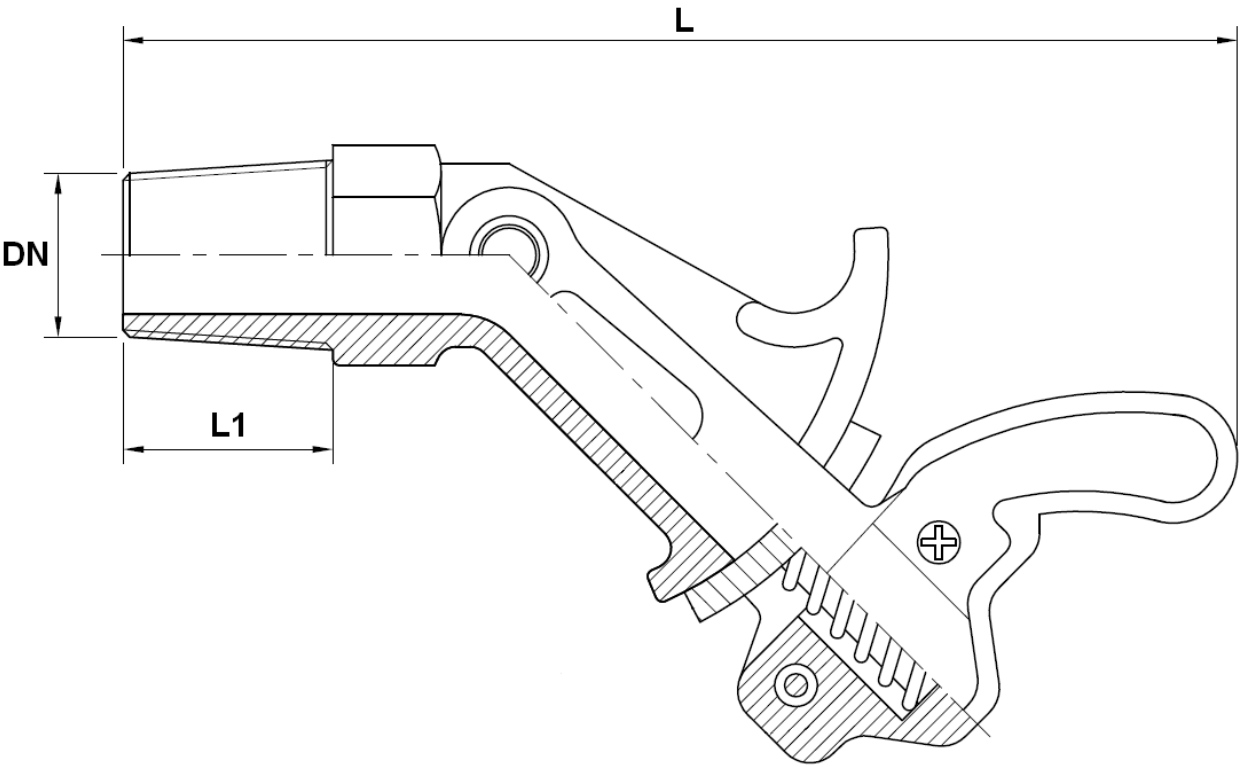

REF.	DN	3/4"	1"1/2	2"	2"1/2	3"	4"
	L	170	200	220	260	300	350
	L1	30	40	40	53	53	60
	Weight (Kg)	0.47	1.24	1.72	4.17	5.75	11.25



PERFECTION VALVE PN10

STANDARDS :

- Fabrication according to ISO 9001 : 2008
- DIRECTIVE 97/23/CE : Risk category I , module A
- Male conical threaded BSP according to ISO 7/1 R

ADVICE : Our opinion and our advice are not guaranteed and shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.