



PRODUCT NUMBER: 2049294
WELDING CUT

MIG and ARC welding in dry or light oily conditions with cut hazards.

Honeywell

Overview

Reference Number

2049294

Product Type

Gloves

Range

Thermal Protection

Line

Welding gloves

Brand

Honeywell

Brand formerly known as

SPERIAN

Industry

- Industry Automotive and Part Manufacturer Building and Construction
- Iron and steel industry
 Metal steel
 Ship Building
 Welding

Product Use

MIG and ARC welding in dry or light oily conditions with cut hazards.

Features & Benefits

Feature

Water repellent cowhide grain leather with back

Water repellent velvet cowhide palm with palm

Water repellent cowhide grain back

US assembly, winged thumb with cord, Crispin type

Elasticated at the back of the hand

Hand fully lined with Kevlar cotton

Split leather, heatproof cuff, 150 m

Benefit

COMFORT

The grain leather has undergone a special tanning process to make it more water repellent.

This provides outstanding comfort and flexibility.

Its US assembly, winged thumb and the flexible materials used make this glove ergonomic, thus providing the user with comfort of use.

The Kevlar® fleece lining increases the glove's comfort and thermal insulation.

SAFETY

The grain leather with its heatproof and water repellent treatment can perform welding or cutting operations in a damp environment without the entrance of humidity.

The split leather cuff helps to protect a large part of the forearm against mechanical hazards and splashes.

Technical Description

Description

CE CATEGORY: II Intermediary risks In accordance with standards: NF EN 420-03 EEC Basic standard NF EN 388-03 Mechanical risks NF EN 407-04 Thermical risks

EN 12477-02 Type A Welding risks

CHARACTERISTICS:

Cowhide leather glove

Gunn cut, winged thumb with yoke, gauntlet type

Water-repellent velvet leather palm

Water-repellent grain leather back

Elasticated back

Fully lined in Kevlar® cotton

150 mm heat resistant split leather cuff

Product Technology

Cut and Sewn

Coating Type

Leather and Kevlar®

Length

39 cm

Thicknes

Palm and back : 0,8/1,1 mm - Cuff : 1,1/1,3 mm

Harmlessness

In conformity with the European standards

Dexterity

Class 5

Sizes

7 to 12

EN 407 - Heat and/or Fire

Behaviour and/or fire	4
Resistance to contact heat	1
Resistance to convective heat	4
Resistance to radiant heat	Х
Resistance to small metal splashes	4
Resistance to molten metal splashes	Х

EN 388 - Mechanical Hazards Abrasion Resistance

Abrasion resistance	3
Cutting resistance	2
Tear resistance	2
Puncture resistance	2

EN 12477

Protective gloves for welders Type A

Packaging Label


Tagging

CE HONEYWELL

2049294 XX

EN 420

EN 388 : 3222 EN 407 : 413X4X EN 12477 : A

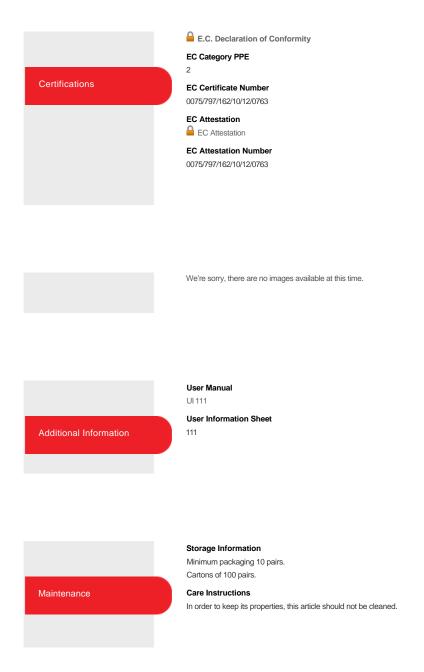

© Honeywell International Inc.



In application of the Directive ref. 89/686/EEC of the 21st of December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decrees n° 92-765, 766 and 768 of 29th of July 1992 concerning the transposition of this Directive into French law,

CTC

4,rue Hermann Frenkel - 69367 Cedex 07 - France
Tel +33 (0)4 72 76 10 10 - Fax +33 (0)4 72 72 76 10 00 - E-Mail : ctclyon@ctcgroupe.com - www.ctc.fr
Comité Professionnel de Développement Cuir Chaussure Maroquinerie - Loi 78-654 du 22,06.1978 - Siret 77564972600160 - Code NAF 9412Z TVA FR 88775649726

authorized by decree of the Ministry of Work, Employment and Health of the 20th of December 2010,

registered under the number 0075, published in OJEC, delivers :

CE TYPE EXAMINATION CERTIFICATE 0075/797/162/10/12/0763

To the following model of personal protective equipment:

* protective glove against welding risks .

* reference of the model: 20 492 94

* responsible for placing on the market:

HONEYWELL SAFETY PRODUCTS EUROPE

Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958 ROISSY CDG CEDEX France

Description of the protective glove, reference of technical rules verified in the context of the CE type examination and informations indicated on the product are detailed in the following pages of this certificate.

Drawn up in Lyon, on October 05th, 2012

Issued by Nadine PIPAZ

CTC 2

NOTA: Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of advess, change of company status) should be brought to the attention of the notified body in accordance with law n° R. 4313-38 of the French Code of Work



1. DESCRIPTION OF THE PROTECTIVE GLOVE

According to the technical file index : 01

Reference: 20 492 94

Basic Model

Dated: SEPTEMBER, 2012

5 fingers leather glove. Cow grain leather water repellent + cuff split leather

Available sizes:

08 09 10 11

Visual description :



Material:

	Colour	Material	Gauges	Thikness
PALM	Yellow	velvet water- repellent leather		0,8/1,1mm
	Natural	kevlar thread		
	Yellow	grain leather water-reppelent		0,8/1,1mm
BACK	Natural	White elastic(rubber band) 1cm or equivalent		
LINING	Natural	kevlar/cotton		
CUFF	Red	heat resistant Leather		1,1/1,3mm
BINDING				



2. PROTECTION SCOPE

Compliance with the essential requirements of the Directive 89/686/EEC has been verified by using following technical rules:

- * EN 420:2003+A1:2009
- * EN 388:2003
- * EN 407:2004
- * Innocuousness
- General requirements for gloves and test methods
- Protective glove against mechanical risks
- Protective gloves against thermal risks
- * EN 12477:2001/A1:2005 Protective gloves for welders
 - At the date of certificate, the product is in compliance with Annex XVII of European REACh regulation (552/2009/EC and associated revisions).

References of test reports performed in order to verify the compliance with the requirements of the technical rules:

Laboratory	CTC Asia	CTC France	Other
EN 420		0710-11615/1 1005-6323/1 1012-14933/1 1101-1094/1 1104-5377/1 1202-1738/1	1104-5377/1
Azo		1005-6323/1	
EN 388		1005-6323/1 1209-13544/1	
EN 407		1005-6323/1 1208-11627/1 1208-11629/1	

Performance levels offered against mechanical risks (EN 388:2003) are:

Abrasion resistance	Blade cut resistance	Tear strength resistance	Puncture resistance	
3	2	2	2	

The levels of performance have been measured on the palm

Performance levels offered against thermal risks (EN 407:2004) are:

Burning behaviour	Contact heat	Convective heat	Radiant heat	molten	Large quantities of molten metal
4	1	3	X	4	Х

« X » means that the test hasn't been performed; no protection is required

Performance levels offered for welders (EN 12477:2001 / A1 :2005) are:

In conformity with type A: Is recommended for applications whithout high dexterity



Each glove is clearly marked with the following information:

- * Logo of the authorized representative:
- * (marking
- * reference of the model:

20 492 94

- * size
- * pictogram for mechanical risks followed by the performance levels
- * pictogram for thermal risks followed by the performance levels
- * reference of the standard for welding glove and the type required
- * information pictogram

Marking example:

Honeywell

20 492 94 XX

EN 12477 TYPE A











E.C. Declaration of Conformity

The manufacturer or its legal representative supplier in the European Community:

Honeywell Safety Products Europe

<u>Declares that the Personal Protective Equipment described here after conforms to the provisions of the European Council Directive 89/686/CEE:</u>

Designation: WELDING CUT

Reference: 2049294

Standard(s): EN 12477, EN 388, EN 407, EN 420

This PPE is the object of the below EC examination certificate n°:

0075/797/162/10/12/0763

Delivered by:

CENTRE TECHNIQUE DU CUIR 4 rue Hermann Frenkel 69367 Lyon Cedex 07

Drawn up in Lyon, on the 23/04/2015

By: Nadine Pipaz **Division**: Gloves

HONEYWELL SAFETY PRODUCTS EUROPE Immeuble Edison - ZI Paris Nord II - 33 rue des Vanesses BP 65288 Villepinte - 95956 ROISSY CDG CEDEX SAS au capital 17 730 000 € - Sirej 348,463 307 00137 Tel. +331 4990 7979 - Fax CS2-4990 7980

> ZI Paris Nord II 33, rue des Vanesses BP 50288 95958 Roissy CDG France Tel: +33 (0) 49 90 79 79 Fax: +33 (0)1 49 90 79 80 www.honeywellsafety.com